

# ***LOAD CELLS/FORCE TRANSDUCERS AND ACCESSORIES***

No.19, 2007



**ZHONGHANG ELECTRONIC MEASURING INSTRUMENTS CO., LTD**

---


## Brief Introduction

Zhonghang Electronic Measuring Instruments Co., Ltd (ZEMIC) is a diversified modern high-tech enterprise, mainly producing the electronic measuring products such as strain gages, load cells, portable weigh pads, and automobile test facilities. It is the leading manufacturer of load cells and strain gages, meanwhile it is the vice-council entity of China Weighing Instrument Association.

By right of eximious tradition in aviation industry and 30 years designing and manufacturing experience of electronic measuring products, stable staff team, with advanced equipment and the biggest scope of strain gages and load cells production line, ZEMIC has possessed the capability of producing 30 million pieces strain gages and 800 thousand units industrial and commercial load cells and 5 million pieces miniature sensors annually.

Relying on the continuous improvement of strain gage technology, through network calibration and management in the production line, adopting advanced test and control methods, ZEMIC realized to compensate and calibrate each individual load cells. All the products have been produced in accordance with international standard (OIML, NTEP, ATEX and FM), ISO 9001 quality insurance system and RoHS directives have been implemented completely during the production process. 21 models load cells have gained the OIML R60 certificates, and 4 models have gained NTEP certificates, 3 series & 29 models have passed the metrology type approval in Russia, 6 series & 78 models have passed the metrology type approval in Ukraine, 6 series & 68 models have passed or been in going on anti-explosion approval. The development of digital load cells and high temperature load cells have obtained great improvement, which makes ZEMIC being able to start producing in mass production.

Supported by the direct sales network nationwide and distributors around the world, and its subsidiaries ZEMIC Europe and ZEMIC USA, ZEMIC is offering high quality products and good service to the increasing customers in home and abroad. Being more quickly to commit itself to technique innovation and comprehensive improvement, and being better to start sincere cooperation and high quality service, ZEMIC is tying to achive the goal of becoming a top rank supplier in strain gages and load cells industry in the world.

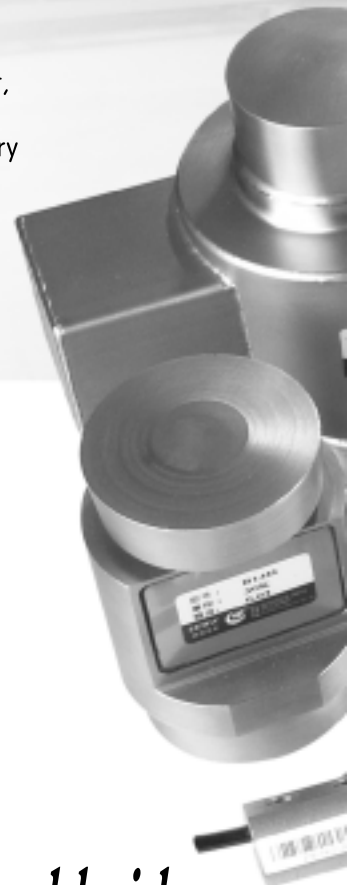

*Measuring Excellence Worldwide*

---

# Quality Policy


Customer First

Developing and Improving Continuously


Offering High Quality Products and Service



# Naming System of Load Cell / Force Transducers

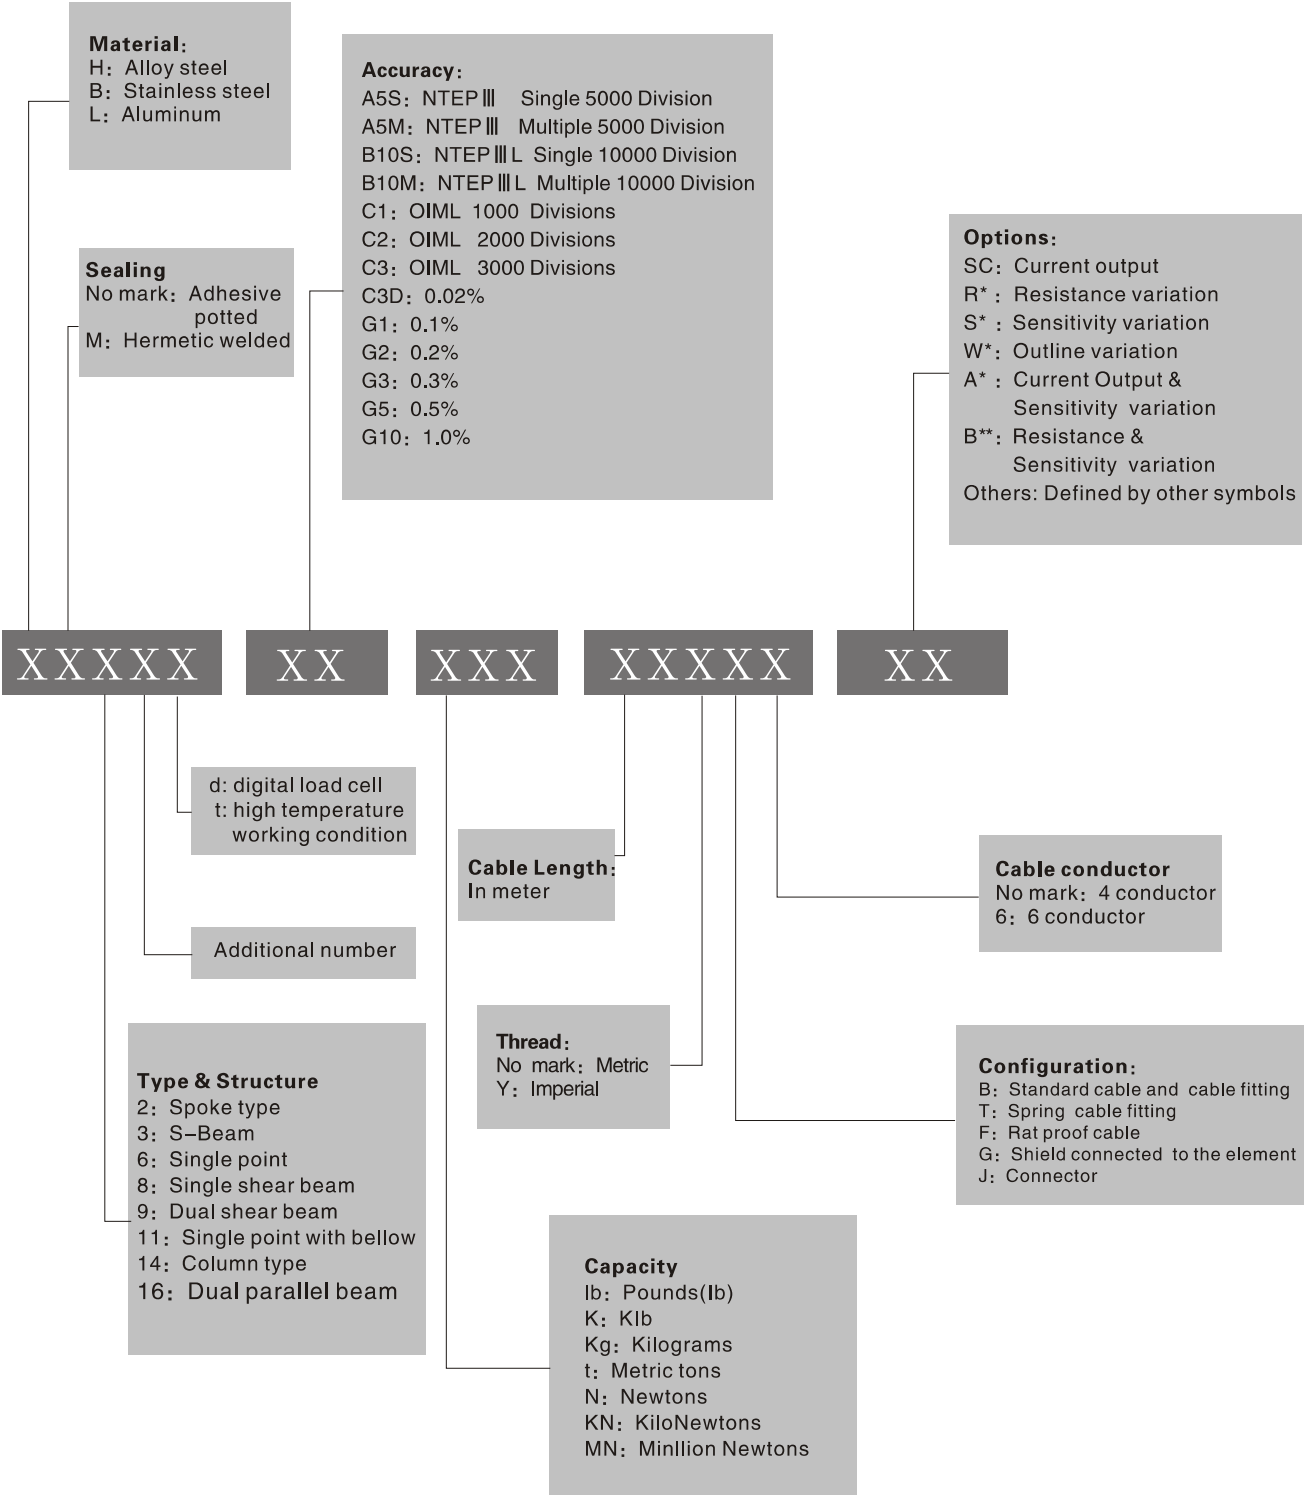

# Naming System of Weighing Assembly

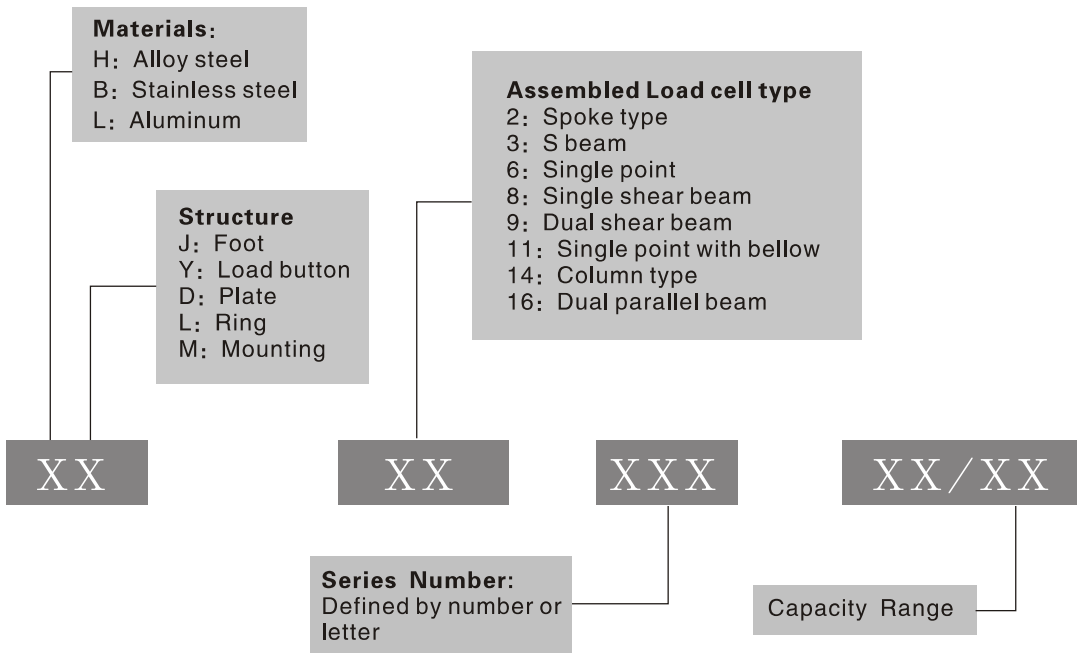

## Load Cell Protection Class

Reference to National Standard of the Cover Protection Class System(P.R.C)  
Equal to IEC529 Standard(International Electrician Association)

Class	Protection Degree		Experimental Method	ZEMIC Achived Protection Class
	Description	Meanings		
5	Water-sprinkle proof	Not be affected by the water-sprinkle from anydirections in a short time	<p>Continually spray water from any directions is more than 15 minutes</p>	Adhesive sealed common load cells could achieve
6	Water-sprayed protection	Not be affected by the strong water-spray from any directions in a short time	<p>Continually spray water from any directions is more than 15 minutes</p>	Cover sealed inner adhesive protected load cells could achieve
7	Soggy Proof	Not be affected by inundating into the water in a stated pressure and time	<p>Inundate into the 1 meter deep water for 30 minutes</p>	Cover(or bellow) welded, inner adhesive protected load cells could achieve. Besides of oil-proof, water proof, it also can proof the common corrosive gas and medium
8	Diving Proof	Can dived into the water for a long time	Decided individually	Special required load cells could be customized















































IP-6-

Soggy Protection class








Dust-proof(dust could not be introduced to the inner part.)

International protection





# Table of Contents

<p><b>LOAD CELL H2A</b></p>  <p>P1</p>	<ul style="list-style-type: none"> <li>• H2A load cells are available for manifold accurate measurement in the capacities 1MN to 5MN.</li> <li>• Alloy steel, surface flange treatment, spray paint, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environment.</li> <li>• Spoke type, easy for installation, suitable for special measuring equipment.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL H2D</b></p>  <p>P2</p>	<ul style="list-style-type: none"> <li>• H2D load cells are available for manifold accurate measurement in the capacities 5t to 20t.</li> <li>• Alloy steel, sealed by adhesive, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments.</li> <li>• Spoke type, easy for installation, suitable for crane scale, hopper scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL H2F</b></p>  <p>P3</p>	<ul style="list-style-type: none"> <li>• H2F load cells are available for manifold accurate measurement in the capacities from 5t to 20t.</li> <li>• Alloy steel, sealed by adhesive, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments.</li> <li>• Spoke type, easy for installation, suitable for electronic truck scale, hopper scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL H3</b></p>  <p>P4</p>	<ul style="list-style-type: none"> <li>• H3 load cells are available in the capacities 25kg to 30t and 100lb to 20Klb.</li> <li>• Alloy steel, sealed by adhesive, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments.</li> <li>• S beam design, tension and/or compression loading possible, easy installation, suitable for crane scale, mechanical conversion scale, hopper scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product that can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL H3C</b></p>  <p>P5</p>	<ul style="list-style-type: none"> <li>• H3C load cells are available in the capacities 10t to 20t .</li> <li>• Alloy steel, sealed by adhesive, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments.</li> <li>• S beam design, tension and/or compression loading possible, easy installation.</li> <li>• Specially designed for crane scale.</li> <li>• It is safety and anti-explosion product that can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL H3E</b></p>  <p>P6</p>	<ul style="list-style-type: none"> <li>• H3E load cells are available in the capacities 1t to 15t and 2K to 30K.</li> <li>• Alloy steel, sealed by adhesive, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments.</li> <li>• S beam design, tension and/or compression loading possible, easy installation, suitable for crane scale, mechanical conversion scale, hopper scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product that can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL H3F</b></p>  <p>P7</p>	<ul style="list-style-type: none"> <li>• H3F load cells are available in the capacities 0.1t to 5t and 250lb to 20Klb.</li> <li>• Alloy steel, sealed by adhesive, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments.</li> <li>• S beam design, tension and/or compression loading possible, easy for installation, suitable for crane scale, mechanical conversion scale, hopper scales and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product that can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL B3G</b></p>  <p>P8</p>	<ul style="list-style-type: none"> <li>• B3G load cells are available in the capacities 0.05t to 10t and 50lb to 20Klb.</li> <li>• They offer total stainless steel construction, complete hermetic sealing, oil proof, waterproof and anti-corrosion making them suitable for use in all kinds of environments.</li> <li>• S beam design, tension and/or compression loading possible, easy installation and flexible application. It is suitable for hanging scale, mechanical conversion scale, hopper scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product that can be used in atrocious weather and hazardous areas .</li> </ul>      
<p><b>LOAD CELL H3G</b></p>  <p>P9</p>	<ul style="list-style-type: none"> <li>• H3G load cells are available in the capacities 0.05t to 7.5t and 50lb to 2Klb.</li> <li>• Alloy steel, sealed by adhesive, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments.</li> <li>• S beam design, tension and/or compression loading possible, easy for installation, suitable for crane scale, mechanical conversion scale, hopper scales and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>     

# Table of Contents

<p><b>LOAD CELL BM3</b></p>  <p>P10</p>	<ul style="list-style-type: none"> <li>• BM3 load cells are available in the capacities 0.5t to 7.5t.</li> <li>• They offer total stainless steel construction, complete hermetic sealing, oil proof, waterproof and anti-corrosion making them suitable for use in all kinds of environments.</li> <li>• S beam design, tension and/or compression loading possible, easy installation and flexible application. It is suitable for crane scale, hopper scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL L3V</b></p>  <p>P11</p>	<ul style="list-style-type: none"> <li>• L3V load cells are available in the capacities 200Kg,500kg</li> <li>• Aluminum material, sealed with silicon adhesive, anodized surface with good resistance against corrosion.</li> <li>• Integral structure, easy installation.</li> <li>• Suitable for electronic measuring systems.</li> </ul>    
<p><b>LOAD CELL L6B</b></p>  <p>P12</p>	<ul style="list-style-type: none"> <li>• L6B load cells are available in the capacities 0.3kg to 3kg.</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti-corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• They are suitable for electronic balance and other electronic weighing devices.</li> </ul>   
<p><b>LOAD CELL H6B</b></p>  <p>P13</p>	<ul style="list-style-type: none"> <li>• H6B load cells are available in the capacities 100kg to 500kg.</li> <li>• Alloy steel, nickel plated, potted by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for multiform environment.</li> <li>• Single point cantilever, easy installation, suitable for electronic platform scale, belt scale and other electronic weighing devices.</li> <li>• It is safety product, anti-explosion and can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL L6C</b></p>  <p>P14</p>	<ul style="list-style-type: none"> <li>• L6C load cells are available in the capacities 3kg to 50kg.</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti-corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• They are suitable for pricing scale, counting scale, electronic balance and other electronic weighing devices.</li> </ul>   
<p><b>LOAD CELL L6D</b></p>  <p>P15</p>	<ul style="list-style-type: none"> <li>• L6D load cells are available in the capacities 2.5kg to 50kg.</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti-corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• They are suitable for pricing scale, counting scale, balance and other electronic weighing devices.</li> </ul>    
<p><b>LOAD CELL L6E</b></p>  <p>P16</p>	<ul style="list-style-type: none"> <li>• L6E load cells are available in the capacities 50kg to 300kg.</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti-corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• They are suitable for pricing scale, platform scale and other electronic weighing devices.</li> </ul>    
<p><b>LOAD CELL B6E</b></p>  <p>P17</p>	<ul style="list-style-type: none"> <li>• B6E load cells are available in the capacities 20kg to 300kg.</li> <li>• They offer 17-4PH stainless steel construction, complete hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Single point parallel beam, suitable for electronic scale, electronic platform scale, belt scale and other electronic weighing devices.</li> </ul>    
<p><b>LOAD CELL H6E</b></p>  <p>P18</p>	<ul style="list-style-type: none"> <li>• H6E load cells are available for manifold accurate measurement in the capacities 20kg to 300kg</li> <li>• Alloy steel, nickel plated, potted by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for multiform environment.</li> <li>• Single point cantilever, suitable for electronic scale, electronic platform scale, belt scale and other electronic weighing devices.</li> <li>• Max. platform size: 400 × 400mm</li> </ul>    














































# Table of Contents

<p><b>LOAD CELL L6E3</b></p>  <p>P19</p>	<ul style="list-style-type: none"> <li>• L6E3 load cells are available in the capacities 50kg to 300kg.</li> <li>• Aluminum–alloy construction, silicone adhesive sealed, surface anodized and anti–corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• They are suitable for pricing scale, platform scale and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL B6E3</b></p>  <p>P20</p>	<ul style="list-style-type: none"> <li>• B6E3 load cells are available in the capacities 20kg to 300kg.</li> <li>• They offer 17–4PH stainless steel construction, complete hermetic sealing, oil proof, waterproof, anti–corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Single point parallel beam, suitable for electronic scale, electronic platform scale, belt scale and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL H6E3</b></p>  <p>P21</p>	<ul style="list-style-type: none"> <li>• H6E3 load cells are available for manifold accurate measurement in the capacities 20kg to 300kg</li> <li>• Alloy steel, nickel plated, potted by adhesive inside, oil–proof, waterproof and anti–corrosion, suitable for multiform environment.</li> <li>• Single point cantilever, suitable for electronic scale, electronic platform scale, belt scale and other electronic weighing devices.</li> <li>• Max. platform size: 400 × 400mm</li> </ul> 
<p><b>LOAD CELL L6F</b></p>  <p>P22</p>	<ul style="list-style-type: none"> <li>• L6F load cells are available in the capacities 50kg to 2000kg.</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti–corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• They are suitable for pricing scale, platform scale and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL B6F</b></p>  <p>P23</p>	<ul style="list-style-type: none"> <li>• B6F load cells are available in the capacities 50kg to 2000kg.</li> <li>• They offer 17–4PH stainless steel construction, complete hermetic sealing, oil proof, waterproof, anti–corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Single point parallel beam, suitable for electronic scale, electronic platform scale, belt scale and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL CELL H6F</b></p>  <p>P24</p>	<ul style="list-style-type: none"> <li>• H6F load cells are available for manifold accurate measurement in the capacity 50kg to 2000kg</li> <li>• Alloy steel, nickel plated, potted by adhesive inside, oil–proof, waterproof and anti–corrosive gas and medium, suitable for multiform environments.</li> <li>• Single point cantilever, suitable for electronic scale, electronic platform scale, belt scale and other electronic weighing devices.</li> <li>• Max. platform size: 50 ~200kg: 600 × 600 250 ~ 500kg: 600 × 800 750kg ~ 2t: 1200 × 1200</li> </ul> 
<p><b>LOAD CELL L6G</b></p>  <p>P25</p>	<ul style="list-style-type: none"> <li>• L6G load cells are available for manifold accurate measurement in the capacities 50kg to 600kg</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti–corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• They are suitable for pricing scale, platform scale and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL B6G</b></p>  <p>P26</p>	<ul style="list-style-type: none"> <li>• B6G load cells are available for manifold accurate measurement in the capacities 50kg to 635kg.</li> <li>• They offer 17–4PH stainless steel construction, complete hermetic sealing, oil proof, waterproof, anti–corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Single point parallel beam, suitable for electronic scale, electronic platform scale, belt scale and other electronic weighing devices.</li> <li>• Max. Platform size: 600 × 600</li> </ul> 
<p><b>LOAD CELL H6G</b></p>  <p>P27</p>	<ul style="list-style-type: none"> <li>• H6G load cells are available for manifold accurate measurement in the capacity 50kg to 635kg</li> <li>• Alloy steel, nickel plated, potted by adhesive inside, oil–proof, waterproof and anti–corrosive gas and medium, suitable for multiform environments.</li> <li>• Single point cantilever, suitable for electronic scale, electronic platform scale, belt scale and other electronic weighing devices.</li> </ul> 

# Table of Contents

<p><b>LOAD CELL B6G5</b></p>  <p>P28</p>	<ul style="list-style-type: none"> <li>• B6G5 load cells are available in the capacities 0.05t to 2t.</li> <li>• They offer 17–4PH stainless steel construction, complete hermetic sealing, oil proof, waterproof, anti–corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Single point parallel beam and they are suitable for electronic scale, electronic platform scale, belt scale and other electronic weighing devices.</li> </ul> <p>     </p>
<p><b>LOAD CELL H6G5</b></p>  <p>P29</p>	<ul style="list-style-type: none"> <li>• H6G5 load cells are available for manifold accurate measurement in the capacities 50kg to 2000kg</li> <li>• Alloy steel, nickel plated, potted by adhesive inside, oil–proof, waterproof and anti–corrosive gas and medium, suitable for multiform environments.</li> <li>• Single point cantilever, suitable for electronic scale, electronic platform scale, belt scale and other electronic weighing devices.</li> <li>• Max. platform size: 50kg ~ 1t: 600 × 800 1.5t ~ 2t: 1000 × 1000</li> </ul> <p>     </p>
<p><b>LOAD CELL L6H5</b></p>  <p>P30</p>	<ul style="list-style-type: none"> <li>• L6H5 load cells are available for manifold accurate measurement in the capacities 4kg to 20kg</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti–corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• Suitable for electronic pricing scale, electronic packaging scale and other electronic weighing devices.</li> </ul> <p>    </p>
<p><b>LOAD CELL L6J</b></p>  <p>P31</p>	<ul style="list-style-type: none"> <li>• L6J load cells are available for manifold accurate measurement in the capacities 1kg to 20kg</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti– corrosion.</li> <li>• Integral structure, easy installation.</li> <li>• Suitable for electronic pricing scale, electronic counting scale, electronic balance and other electronic weighing devices.</li> </ul> <p>    </p>
<p><b>LOAD CELL L6J1</b></p>  <p>P32</p>	<ul style="list-style-type: none"> <li>• L6J1 load cells are available for manifold accurate measurement in the capacities 0.3kg to 3kg.</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti– corrosion.</li> <li>• Integral structure, easy installation.</li> <li>• Suitable for electronic pricing scale, electronic counting scale, electronic balance and other electronic weighing devices.</li> </ul> <p>    </p>
<p><b>LOAD CELL H6K</b></p>  <p>P33</p>	<ul style="list-style-type: none"> <li>• H6K load cell is available for manifold accurate measurement in the capacity 1KN</li> <li>• Alloy steel, nickel plated, potted by adhesive inside, oil–proof, waterproof and anti–corrosion, suitable for multiform environments.</li> <li>• Single point parallel beam and easy installation, it is suitable for automobile testing facilities.</li> <li>• It is safety and anti–explosion product and can be used in atrocious weather and hazardous areas .</li> </ul> <p>     </p>
<p><b>LOAD CELL L6L</b></p>  <p>P34</p>	<ul style="list-style-type: none"> <li>• L6L load cells are available for manifold accurate measurement in the capacities 5kg to 200kg</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti– corrosion.</li> <li>• Integral structure, easy for installation.</li> <li>• Suitable for electronic pricing scale, electronic counting scale, platform scale and other electronic weighing devices.</li> </ul> <p>    </p>
<p><b>LOAD CELL L6N</b></p>  <p>P35</p>	<ul style="list-style-type: none"> <li>• L6N load cells are available for manifold accurate measurement in the capacities 3kg to 100kg</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti– corrosion.</li> <li>• Integral structure, easy installation.</li> <li>• Suitable for electronic pricing scale, electronic counting scale, platform scale and other electronic weighing devices.</li> </ul> <p>     </p>
<p><b>LOAD CELL B6N</b></p>  <p>P36</p>	<ul style="list-style-type: none"> <li>• B6N load cells are available in the capacities 5kg to 200kg.</li> <li>• They offer total stainless steel construction, complete hermetic sealing, oil proof, water–proof and anti–corrosion making them suitable for use in all kinds of environments.</li> <li>• Single point parallel beam, easy installation and it is suitable for electronic platform scale, belt scale and other electronic weighing devices.</li> <li>• It is safety and anti–explosion product and can be used in atrocious weather and hazardous areas .</li> </ul> <p>     </p>



















# Table of Contents

<p><b>LOAD CELL L6Q</b></p>  <p>P37</p>	<ul style="list-style-type: none"> <li>• L6Q load cells are available for manifold accurate measurement in the capacities 50kg to 250kg</li> <li>• Aluminum construction, silicone adhesive sealed, stainless steel cover, surface anodized and anti-corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• Suitable for electronic pricing scale, electronic counting scale, platform scale and other electronic weighing devices.</li> </ul>    
<p><b>LOAD CELL B6Q</b></p>  <p>P38</p>	<ul style="list-style-type: none"> <li>• B6Q load cells are available in the capacities 150kg,200kg and 250kg.</li> <li>• They offer total stainless steel construction, complete hermetic sealing, oil proof, waterproof and anti-corrosion making them suitable for use in all kinds of environments.</li> <li>• Single point parallel beam, easy installation and it is suitable for electronic platform scale, belt scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL L6T</b></p>  <p>P39</p>	<ul style="list-style-type: none"> <li>• L6T load cells are available for manifold accurate measurement in the capacities 50kg to 1000kg</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti-corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• Suitable for electronic platform scale, or dual structure electronic scale and other electronic weighing devices.</li> </ul>   
<p><b>LOAD CELL L6W</b></p>  <p>P40</p>	<ul style="list-style-type: none"> <li>• L6W load cells are available for manifold accurate measurement in the capacities 50kg to 635kg</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti-corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• Suitable for electronic pricing scale, electronic platform scale and other electronic weighing devices.</li> </ul>    
<p><b>LOAD CELL BM6A</b></p>  <p>P41</p>	<ul style="list-style-type: none"> <li>• BM6A load cells are available in the capacities 6kg to 60kg.</li> <li>• They offer total stainless steel construction, complete hermetic sealing, oil proof, waterproof and anti-corrosion making them suitable for use in all kinds of environments.</li> <li>• Single point, easy installation and flexible application. They are suitable for platform scale, packing scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL BM6G</b></p>  <p>P42</p>	<ul style="list-style-type: none"> <li>• BM6G load cells are available in the capacities 75kg to 500kg.</li> <li>• They offer total stainless steel construction, complete hermetic sealing, oil proof, waterproof and anti-corrosion making them suitable for use in all kinds of environments.</li> <li>• Single point, easy installation and flexible application and they are suitable for platform scale, belt scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL H8</b></p>  <p>P43</p>	<ul style="list-style-type: none"> <li>• H8 load cells are available in manifold accurate measurement in the capacities 0.5t to 25</li> <li>• Alloy steel, cover welded, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environment.</li> <li>• Single shear beam, easy for installation, suitable for electronic truck scales, track scales, hopper scales, and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>     
<p><b>LOAD CELL HM8</b></p>  <p>P44</p>	<ul style="list-style-type: none"> <li>• HM8 load cells are available in manifold accurate measurement in the capacities 0.5t to 50t</li> <li>• Alloy steel, hermetically sealed, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environment.</li> <li>• Single shear beam, easy for installation, suitable for electronic truck scale, track scale, hopper scale, and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL H8B</b></p>  <p>P45</p>	<ul style="list-style-type: none"> <li>• H8B load cells are available in manifold accurate measurement in the capacities 0.5t to 10t</li> <li>• Alloy steel, potted by adhesive inside, steel ball supported, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environment.</li> <li>• Single shear beam, easy for installation, suitable for electronic truck scales, track scales, automobile test line ,hopper scales, and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>    



















































# Table of Contents

<p><b>LOAD CELL H8C</b></p>  <p>P46</p>	<ul style="list-style-type: none"> <li>• H8C load cells are available in manifold accurate measurement in the capacities 1Kb to 20Klb and 0.5t to 10t.</li> <li>• Alloy steel, potted by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable all kinds of environments.</li> <li>• Single shear beam, easy for installation, suitable for electronic platform scale, hopper scale, and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul> 
<p><b>LOAD CELL HM8C</b></p>  <p>P47</p>	<ul style="list-style-type: none"> <li>• HM8C load cells are available in manifold accurate measurement in the capacities 0.5t to 5t</li> <li>• Alloy steel, hermetically sealed, oil-proof, waterproof and anti-corrosion, suitable for multiform environments.</li> <li>• Single shear beam, easy installation, suitable for electronic platform scale, hopper scale, and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul> 
<p><b>LOAD CELL B8D</b></p>  <p>P48</p>	<ul style="list-style-type: none"> <li>• B8D load cells are available in the capacities 250lb to 20Klb and 0.5t to 10t.</li> <li>• They offer total stainless steel construction, complete hermetic sealing, oil proof, waterproof and anti-corrosion making them suitable for use in all kinds of environments.</li> <li>• Single shear beam, easy installation and they are suitable for floor scale, automobile test facilities, hopper scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul> 
<p><b>LOAD CELL BM8D</b></p>  <p>P49</p>	<ul style="list-style-type: none"> <li>• BM8D load cells are available in the capacities 1Klb to 20Klb and 0.5t to 10t.</li> <li>• They offer total stainless steel construction, cover board hermetic sealing, oil proof, waterproof and anti-corrosion making them suitable for use in all kinds of environments.</li> <li>• Single shear beam design, easy installation and they are suitable for platform scale, truck scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul> 
<p><b>LOAD CELL H8H</b></p>  <p>P50</p>	<ul style="list-style-type: none"> <li>• H8H load cells are available in manifold accurate measurement in the capacities 0.25t to 5t</li> <li>• Alloy steel, cover welded, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments.</li> <li>• Single shear beam, easy installation, suitable for electronic truck scale, track scale, hopper scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul> 
<p><b>LOAD CELL BM8H</b></p>  <p>P51</p>	<ul style="list-style-type: none"> <li>• BM8H load cells are available in the capacities 500lb to 10Klb and 0.25t to 5t.</li> <li>• They offer total stainless steel construction, cover board hermetic sealing, oil proof, waterproof and anti-corrosion making them suitable for use in all kinds of environments.</li> <li>• Single shear beam, easy installation and they are suitable for truck scale, track scale, hopper scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul> 
<p><b>LOAD CELL B9B1</b></p>  <p>P52</p>	<ul style="list-style-type: none"> <li>• B9B1 load cell is available in manifold accurate measurement in the capacity 2t.</li> <li>• Stainless steey, potted by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for multiform environments.</li> <li>• Dual shear beam, easy installation, suitable for electronic truck scale, platform scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul> 
<p><b>LOAD CELL HM9B</b></p>  <p>P53</p>	<ul style="list-style-type: none"> <li>• HM9B load cells are available in manifold accurate measurement in the capacities 10t to 50t.</li> <li>• Alloy steel, nickel plated, hermetically sealed oil-proof, waterproof and anti-corrosion, suitable for multiform environments.</li> <li>• Dual shear beam, suitable for electronic truck scale, track scale and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL B9C</b></p>  <p>P54</p>	<ul style="list-style-type: none"> <li>• B9C load cells are available in the capacities 5Klb to 250Klb.</li> <li>• They offer 17-4PH stainless steel construction, electronic hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Dual shear beam and they are suitable for truck scale, automobile test facilities, track scale, and other electronic weighing devices.</li> </ul> 

# Table of Contents

<p><b>LOAD CELL H9C</b></p>  <p>P55</p>	<ul style="list-style-type: none"> <li>• H9C load cells are available in the capacities 5Klb to 250Klb.</li> <li>• Alloy steel, complete hermetical sealing, oil-proof, waterproof and resistance for normal corrosive gas or medium, suitable for multiform environments.</li> <li>• Dual shear beam, easy installation, suitable for electronic truck scale, track scale, automobile test line and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL HM9C</b></p>  <p>P56</p>	<ul style="list-style-type: none"> <li>• HM9C load cells are available in the capacities 5Klb to 250Klb.</li> <li>• Alloy steel, complete welded, oil-proof, waterproof and resistance for normal corrosive gas or medium, suitable for multiform environments.</li> <li>• Dual shear beam, suitable for electronic truck scale, track scale, automobile test line and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL B9D</b></p>  <p>P57</p>	<ul style="list-style-type: none"> <li>• B9D load cells are available in the capacities 1Klb to 75Klb.</li> <li>• They offer 17-4PH stainless steel construction, electronic hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Dual shear beam and they are suitable for truck scale, automobile test facilities, track scale, and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL H9D</b></p>  <p>P58</p>	<ul style="list-style-type: none"> <li>• H9D load cells are available in the capacities 1Klb to 75Klb.</li> <li>• Alloy steel, complete hermetical sealing, oil-proof, waterproof and resistance for normal corrosive gas or medium, suitable for multiform environments.</li> <li>• Dual shear beam, easy for installation, suitable for electronic truck scale, track scale, automobile test line and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL B9E</b></p>  <p>P59</p>	<ul style="list-style-type: none"> <li>• B9E load cells are available in the capacities 50Klb to 150Klb.</li> <li>• They offer 17-4PH stainless steel construction, electronic hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Dual shear beam and they are suitable for truck scale, hopper scale and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL HM9E</b></p>  <p>P60</p>	<ul style="list-style-type: none"> <li>• HM9E load cells are available in the capacities 5Klb to 250Klb and 20t to 100t.</li> <li>• Alloy steel, nickel plated, complete welded, oil-proof, waterproof and resistance for normal corrosive gas or medium, suitable for multiform environments.</li> <li>• Dual shear beam, suitable for electronic truck scale, track scale, and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL B9F</b></p>  <p>P61</p>	<ul style="list-style-type: none"> <li>• B9F load cells are available in the capacities 10Klb to 75Klb.</li> <li>• They offer 17-4PH stainless steel construction, complete hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Dual shear beam and they are suitable for truck scale, track scale, hopper scale and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL B9H</b></p>  <p>P62</p>	<ul style="list-style-type: none"> <li>• B9H load cells are available in the capacities 50Klb to 100Klb.</li> <li>• They offer 17-4PH stainless steel construction, electronic hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Dual shear beam and they are suitable for truck scale, track scale and other electronic weighing devices.</li> </ul> 
<p><b>LOAD CELL H9H</b></p>  <p>P63</p>	<ul style="list-style-type: none"> <li>• H9H load cells are available in the capacities 50Klb to 100Klb.</li> <li>• Alloy steel, nickel plated, potted by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for multiform environments.</li> <li>• Dual shear beam, suitable for electronic truck scale, track scale and other electronic weighing devices.</li> </ul> 










# Table of Contents

<p><b>LOAD CELL B9N</b></p>  <p>P64</p>	<ul style="list-style-type: none"> <li>• B9N load cells are available in the capacities 10Klb to 125Klb.</li> <li>• They offer 17-4PH stainless steel construction, electronic hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them suitable for use in all kinds of environments.</li> <li>• Dual shear beam and they are suitable for platform scale, truck scale and other electronic weighing devices.</li> </ul>    
<p><b>LOAD CELL H9N</b></p>  <p>P65</p>	<ul style="list-style-type: none"> <li>• H9N load cells are available in the capacities 25Klb to 200Klb.</li> <li>• Alloy steel, nickel plated, potted by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for multiform environments.</li> <li>• Dual shear beam, suitable for electronic platform scale, truck scale and other electronic weighing devices.</li> </ul>    
<p><b>LOAD CELL BM11</b></p>  <p>P66</p>	<ul style="list-style-type: none"> <li>• BM11 load cells are available in the capacities 20kg to 500kg.</li> <li>• They offer total stainless steel construction, bellow hermetic sealing, oil proof, waterproof and anti-corrosion making them suitable for use in all kinds of environments.</li> <li>• Single point with bellow, easy installation, flexible application and they are suitable for belt scale, hopper scale and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>      
<p><b>LOAD CELL HM11</b></p>  <p>P67</p>	<ul style="list-style-type: none"> <li>• HM11 load cells are available for manifold accurate measurement in the capacities 20kg to 500kg.</li> <li>• Alloy steel, weld with bellow, potted by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for multiform environments.</li> <li>• Single point with bellow, easy installation. Suitable for electronic belt scales, hopper scales, and other electronic weighing devices.</li> <li>• It is safety and anti-explosion product and can be used in atrocious weather and hazardous areas .</li> </ul>    
<p><b>LOAD CELL BM14A</b></p>  <p>P68</p>	<ul style="list-style-type: none"> <li>• BM14A load cells are available in the capacities 10t to 100t and 10Klb to 500Klb.</li> <li>• They offer 17-4PH stainless steel construction, electronic hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them lightening protected in all kinds of environments.</li> <li>• Multiple column design, automatically recovery and they are suitable for platform scale, automobile testing facilities, hopper scale and other electronic weighing devices</li> </ul>     
<p><b>LOAD CELL BM14C</b></p>  <p>P69</p>	<ul style="list-style-type: none"> <li>• BM14C load cells are available in the capacities 10 to 50t.</li> <li>• They offer 17-4PH stainless steel construction, electronic hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them lightening protected in all kinds of environments.</li> <li>• Single column, automatically recovery and they are suitable for truck scale, track scale and other electronic weighing devices.</li> </ul>     
<p><b>LOAD CELL HM14C</b></p>  <p>P70</p>	<ul style="list-style-type: none"> <li>• HM14C load cells are available in manifold accurate measurement in the capacities 10t to 50t.</li> <li>• Alloy steel, nickel plated, hermetically sealed, oil-proof, waterproof and anti-corrosion, suitable for multiform environments.</li> <li>• Single column, suitable for electronic truck scale, track scale and all kinds of electronic weighing devices.</li> </ul>    
<p><b>LOAD CELL BM14D</b></p>  <p>P71</p>	<ul style="list-style-type: none"> <li>• BM14D load cells are available in the capacities 10t to 100t.</li> <li>• They offer 17-4PH stainless steel construction, electronic hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them lightening protected in all kinds of environments.</li> <li>• Single column design, automatically recovery and they are suitable for platform scale, automobile testing facilities, hopper scale and other electronic weighing devices.</li> </ul>    
<p><b>LOAD CELL BM14G</b></p>  <p>P72</p>	<ul style="list-style-type: none"> <li>• BM14G load cells are available in the capacities 10t to 50t.</li> <li>• They offer 17-4PH stainless steel construction, electronic hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them lightening protected in all kinds of environments.</li> <li>• Single column design, automatically recovery and they are suitable for platform scale, automobile testing facilities, hopper scale and other electronic weighing devices.</li> </ul>     




# Table of Contents

<p><b>LOAD CELL BM14K</b></p>  <p>P73</p>	<ul style="list-style-type: none"> <li>• BM14K load cells are available in the capacities 10t to 100t.</li> <li>• They offer 17-4PH stainless steel construction, electronic hermetic sealing, oil proof, waterproof, anti-corrosive gas and medium making them lightning protected in all kinds of environments.</li> <li>• Single column, automatically recovery and they are suitable for platform scale, automobile testing facilities, hopper scale and other electronic weighing devices.</li> </ul> 																								
<p><b>LOAD CELL L16</b></p>  <p>P74</p>	<ul style="list-style-type: none"> <li>• L16 load cell is available in the capacity 500kg.</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti-corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• They are suitable for electron measuring system.</li> </ul> 																								
<p><b>LOAD CELL L16A</b></p>  <p>P75</p>	<ul style="list-style-type: none"> <li>• L16A load cell is available in the capacity 100kg.</li> <li>• Aluminum construction, silicone adhesive sealed, surface anodized and anti-corrosion.</li> <li>• Integral structure and easy installation.</li> <li>• They are suitable for pedal and brake measurement.</li> </ul> 																								
<p><b>ACCESSORY BJ-8-202 ACCESSORY BJ-8-205</b></p>  <p>P76</p>	<p><b>Features</b> Easy installation, adjustable height, anti-corrosion, with a steel ball inside to centralize automatically, high ability of anti-side load. Mainly used for floor scale, platform scale in harsh and corrosive environment.</p>																								
<p><b>ACCESSORY BJ-8-206 ACCESSORY BJ-8-207</b></p>  <p>P77</p>	<table border="1"> <thead> <tr> <th colspan="2">ACCESSORY BJ-8-206</th> <th colspan="2">ACCESSORY BJ-8-207</th> </tr> <tr> <th>Capacity</th> <th>Part number</th> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>0.25t-2t</td> <td>BJ-8-206-0.25/2t</td> <td>0.25t-2t</td> <td>BJ-8-207-0.25t/2t</td> </tr> <tr> <td>500lb-4K</td> <td>BJ-8-206-500lb/4k</td> <td>5t</td> <td>BJ-8-207-5t</td> </tr> <tr> <td></td> <td></td> <td>500lb-4Klb</td> <td>BJ-8-207-500lb/4k</td> </tr> <tr> <td></td> <td></td> <td>10Klb</td> <td>BJ-8-207-10K</td> </tr> </tbody> </table>	ACCESSORY BJ-8-206		ACCESSORY BJ-8-207		Capacity	Part number	Capacity	Part number	0.25t-2t	BJ-8-206-0.25/2t	0.25t-2t	BJ-8-207-0.25t/2t	500lb-4K	BJ-8-206-500lb/4k	5t	BJ-8-207-5t			500lb-4Klb	BJ-8-207-500lb/4k			10Klb	BJ-8-207-10K
ACCESSORY BJ-8-206		ACCESSORY BJ-8-207																							
Capacity	Part number	Capacity	Part number																						
0.25t-2t	BJ-8-206-0.25/2t	0.25t-2t	BJ-8-207-0.25t/2t																						
500lb-4K	BJ-8-206-500lb/4k	5t	BJ-8-207-5t																						
		500lb-4Klb	BJ-8-207-500lb/4k																						
		10Klb	BJ-8-207-10K																						
<p><b>ACCESSORY BJ-8-209 ACCESSORY BJ-8-211</b></p>  <p>P78</p>	<p><b>Features</b> Easy installation, adjustable height, anti-corrosion, with a steel ball inside to centralize automatically, high ability of anti-side load. Mainly used for floor scale, platform scale in harsh and corrosive environment.</p>																								
<p><b>ACCESSORY BJ-8-215 ACCESSORY BJ-8-219 ACCESSORY BJ-8-220</b></p>  <p>P79</p>	<table border="1"> <tbody> <tr> <td>Accessory BJ-8-215</td> <td>Accessory BJ-8-219 Accessory BJ-8-220</td> </tr> <tr> <td><b>Features</b> Easy installation, adjustable height, anti-corrosion, with a steel ball inside to centralize automatically, high ability of anti-side load. Mainly used for floor scale, platform scale in harsh and corrosive environment.</td> <td><b>Features</b> Easy installation, inside to centralize automatically and high ability of anti-side load. Mainly used for platform scale, weighbridge and other electronic weighing devices.</td> </tr> </tbody> </table>	Accessory BJ-8-215	Accessory BJ-8-219 Accessory BJ-8-220	<b>Features</b> Easy installation, adjustable height, anti-corrosion, with a steel ball inside to centralize automatically, high ability of anti-side load. Mainly used for floor scale, platform scale in harsh and corrosive environment.	<b>Features</b> Easy installation, inside to centralize automatically and high ability of anti-side load. Mainly used for platform scale, weighbridge and other electronic weighing devices.																				
Accessory BJ-8-215	Accessory BJ-8-219 Accessory BJ-8-220																								
<b>Features</b> Easy installation, adjustable height, anti-corrosion, with a steel ball inside to centralize automatically, high ability of anti-side load. Mainly used for floor scale, platform scale in harsh and corrosive environment.	<b>Features</b> Easy installation, inside to centralize automatically and high ability of anti-side load. Mainly used for platform scale, weighbridge and other electronic weighing devices.																								
<p><b>ACCESSORY BM-8-404</b></p>  <p>P80</p>	<table border="1"> <thead> <tr> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>0.5-2t</td> <td>BM-8-404-0.5/2t</td> </tr> <tr> <td>2.5-5t</td> <td>BM-8-404-2.5/5t</td> </tr> <tr> <td>250lb-5KSE</td> <td>BM-8-404-250lb/5KSE</td> </tr> <tr> <td>5-10Klb</td> <td>BM-8-404-5/10K</td> </tr> </tbody> </table>	Capacity	Part number	0.5-2t	BM-8-404-0.5/2t	2.5-5t	BM-8-404-2.5/5t	250lb-5KSE	BM-8-404-250lb/5KSE	5-10Klb	BM-8-404-5/10K														
Capacity	Part number																								
0.5-2t	BM-8-404-0.5/2t																								
2.5-5t	BM-8-404-2.5/5t																								
250lb-5KSE	BM-8-404-250lb/5KSE																								
5-10Klb	BM-8-404-5/10K																								
<p><b>ACCESSORY BM-8-406</b></p>  <p>P81</p>	<p><b>Features</b> Compact structure, easy installation With anti-reversal ability With anti-overloading ability Correct dislocation automatically</p>																								










# Table of Contents

<p><b>ACCESSORY BM-9-402</b></p>  <p>P82</p>	<p><b>Features</b> Stainless steel integrative assembly can be mounted easily, suitable for testing slight dynamic load under heavy static load, excellent anti-side load ability. Suitable for hopper and tank scales found in petroleum, chemical engineering industries.</p>																	
<p><b>ACCESSORY BM-9-404</b></p>  <p>P83</p>	<p><b>Features</b> Stainless steel integrative assembly can be mounted easily, suitable for testing slight dynamic load under heavy static load, excellent anti-side load ability. Suitable for hopper and tank scales found in petroleum, chemical engineering industries.</p>																	
<p><b>ACCESSORY BY-8-104</b> <b>ACCESSORY BY-8-106</b></p>  <p>P84</p>	<p><b>ACCESSORY BY-8-104</b></p> <p><b>Features</b> Easy installation With restoration ability Anti-partial load and side load Suitable for electronic platform scale</p>	<p><b>ACCESSORY BY-8-106</b></p> <p><b>Features</b> Easy installation, adjustable height, automatically centralized inside, good ability of anti-side load. Mainly used for platform scale, floor scale and other electronic weighing equipment.</p>																
<p><b>ACCESSORY BY-14-101</b> <b>ACCESSORY BY-14-102</b></p>  <p>P85</p>	<p><b>ACCESSORY BY-14-101</b></p> <table border="1"> <thead> <tr> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>10t, 25t</td> <td>BY-14-101-10/25t</td> </tr> <tr> <td>40t, 60t</td> <td>BY-14-101-40/60t</td> </tr> </tbody> </table>	Capacity	Part number	10t, 25t	BY-14-101-10/25t	40t, 60t	BY-14-101-40/60t	<p><b>ACCESSORY BY-14-102</b></p> <table border="1"> <thead> <tr> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>10t, 15t</td> <td>BY-14-102-10/15t</td> </tr> <tr> <td>20t-40t</td> <td>BY-14-102-20/40t</td> </tr> <tr> <td>50t, 60t</td> <td>BY-14-102-50/60t</td> </tr> <tr> <td>100t</td> <td>BY-14-102-100t</td> </tr> </tbody> </table>	Capacity	Part number	10t, 15t	BY-14-102-10/15t	20t-40t	BY-14-102-20/40t	50t, 60t	BY-14-102-50/60t	100t	BY-14-102-100t
Capacity	Part number																	
10t, 25t	BY-14-101-10/25t																	
40t, 60t	BY-14-101-40/60t																	
Capacity	Part number																	
10t, 15t	BY-14-102-10/15t																	
20t-40t	BY-14-102-20/40t																	
50t, 60t	BY-14-102-50/60t																	
100t	BY-14-102-100t																	
<p><b>ACCESSORY BY-14-103</b> <b>ACCESSORY BY-14-105</b></p>  <p>P86</p>	<p><b>ACCESSORY BY-14-103</b></p> <table border="1"> <thead> <tr> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>10t-50t</td> <td>BY-14-103-10/50t</td> </tr> </tbody> </table>	Capacity	Part number	10t-50t	BY-14-103-10/50t	<p><b>ACCESSORY BY-14-105</b></p> <table border="1"> <thead> <tr> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>10t-50t</td> <td>BY-14-105-10/50t</td> </tr> </tbody> </table>	Capacity	Part number	10t-50t	BY-14-105-10/50t								
Capacity	Part number																	
10t-50t	BY-14-103-10/50t																	
Capacity	Part number																	
10t-50t	BY-14-105-10/50t																	
<p><b>ACCESSORY BY-14-106</b> <b>ACCESSORY BY-14-108</b></p>  <p>P87</p>	<p><b>ACCESSORY BY-14-106</b></p> <table border="1"> <thead> <tr> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>10t-50t</td> <td>BY-14-106-10/50t</td> </tr> </tbody> </table>	Capacity	Part number	10t-50t	BY-14-106-10/50t	<p><b>ACCESSORY BY-14-108</b></p> <table border="1"> <thead> <tr> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>10t-50t</td> <td>BY-14-108-10/50t</td> </tr> </tbody> </table>	Capacity	Part number	10t-50t	BY-14-108-10/50t								
Capacity	Part number																	
10t-50t	BY-14-106-10/50t																	
Capacity	Part number																	
10t-50t	BY-14-108-10/50t																	
<p><b>ACCESSORY BY-14-109</b></p>  <p>P88</p>	<table border="1"> <thead> <tr> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>10t-50t</td> <td>BY-14-109-10/50t</td> </tr> </tbody> </table>		Capacity	Part number	10t-50t	BY-14-109-10/50t												
Capacity	Part number																	
10t-50t	BY-14-109-10/50t																	
<p><b>ACCESSORY HD-8-301</b></p>  <p>P89</p>	<p><b>Features</b> Mainly used for platform scale, floor scale, etc.</p>																	
<p><b>ACCESSORY HJ-8-201</b> <b>ACCESSORY HJ-8-203</b></p>  <p>P90</p>	<p><b>ACCESSORY HJ-8-201</b></p> <p><b>Features</b> Easy installation, adjustable height, automatically centralized inside, good ability of anti-side load. Mainly used for platform scale, floor scale and other electronic weighing equipment.</p>	<p><b>ACCESSORY HJ-8-203</b></p> <p><b>Features</b> Alloy steel with rubber washer, screw sandwiched inside can adjust slanted slightly, easy installation. Mainly used for platform scale, packaging scale, hybrid scale, etc.</p>																






# Table of Contents

<p><b>ACCESSORY HJ-8-208</b> <b>ACCESSORY HJ-8-210</b></p>  <p>P91</p>	<p><b>Features</b> Easy installation, adjustable height, automatically centralized inside, good ability of anti-side load. Mainly used for platform scale, floor scale and other electronic weighing equipment.</p>																			
<p><b>ACCESSORY HJ-8-213</b> <b>ACCESSORY HJ-8-214</b> <b>ACCESSORY HJ-8-216</b></p>  <p>P92</p>	<table border="1"> <thead> <tr> <th colspan="2">ACCESSORY HJ-8-213</th> <th colspan="2">ACCESSORY HJ-8-214</th> <th colspan="2">ACCESSORY HJ-8-216</th> </tr> <tr> <th>Capacity</th> <th>Part number</th> <th>Capacity</th> <th>Part number</th> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>0.5-2t</td> <td>HJ-8-213-0.5/2t</td> <td>0.5t-2t</td> <td>HJ-8-214-0.5/2t</td> <td>2.5t-5t</td> <td>HJ-8-216-2.5t-5t</td> </tr> </tbody> </table>		ACCESSORY HJ-8-213		ACCESSORY HJ-8-214		ACCESSORY HJ-8-216		Capacity	Part number	Capacity	Part number	Capacity	Part number	0.5-2t	HJ-8-213-0.5/2t	0.5t-2t	HJ-8-214-0.5/2t	2.5t-5t	HJ-8-216-2.5t-5t
ACCESSORY HJ-8-213		ACCESSORY HJ-8-214		ACCESSORY HJ-8-216																
Capacity	Part number	Capacity	Part number	Capacity	Part number															
0.5-2t	HJ-8-213-0.5/2t	0.5t-2t	HJ-8-214-0.5/2t	2.5t-5t	HJ-8-216-2.5t-5t															
<p><b>ACCESSORY J-8-217</b> <b>ACCESSORY J-8-218</b></p>  <p>P93</p>	<p><b>Features</b> Easy installation, height adjustable, anti-corrosion, with a steel ball inside to centralize automatically, high ability of anti-side load. Mainly used for floor scale, platform scale in harsh and corrosive environments.</p>																			
<p><b>ACCESSORY HJ-8-221</b> <b>ACCESSORY HL-3-001</b></p>  <p>P94</p>	<p><b>ACCESSORY HJ-8-221</b> <b>Features</b> Easy installation, adjustable height, automatically centralized inside, good ability of anti-side load. Mainly used for platform scale, floor scale and other electronic weighing equipment.</p>	<p><b>ACCESSORY HL-3-001</b> <b>Features</b> H3 load cell accessories matched with H3 load cell, suitable for: Hybrid scale, crane scale, packaging scale, hopper scale.</p>																		
<p><b>ACCESSORY HL-3-002</b> <b>ACCESSORY HL-3-003</b></p>  <p>P95</p>	<p><b>Features</b> H3 load cell accessories matched with H3 load cells, suitable for: Hybrid scale, crane scale, cackaging scale, copper scale.</p>																			
<p><b>ACCESSORY HL-3-004</b> <b>ACCESSORY HL-3-005</b></p>  <p>P96</p>	<p><b>Features</b> H3 load cell accessories matched with H3 load cells, suitable for: Hybrid scale, crane scale, packaging scale, hopper scale.</p>																			
<p><b>ACCESSORY HM-2-401</b></p>  <p>P97</p>	<p><b>Features</b> With horizontal locating ability With anti-reversal ability With automatically restoration ability Compact structure, easy installation</p>																			
<p><b>ACCESSORY HM-8-401</b></p>  <p>P98</p>	<p><b>Features</b> With horizontal locating ability With anti-reversal ability With automatically restoration ability Compact structure, easy installation</p>																			
<p><b>ACCESSORY HM-8-402</b></p>  <p>P99</p>	<table border="1"> <thead> <tr> <th>Capacity</th> <th>Part number</th> </tr> </thead> <tbody> <tr> <td>0.5-2t</td> <td>HM-8-402-0.5/2t</td> </tr> <tr> <td>2.5-5t</td> <td>HM-8-402-2.5/5t</td> </tr> <tr> <td>1-4Klb</td> <td>HM-8-402-1/4K</td> </tr> <tr> <td>5-10Klb</td> <td>HM-8-402-5/10K</td> </tr> </tbody> </table>		Capacity	Part number	0.5-2t	HM-8-402-0.5/2t	2.5-5t	HM-8-402-2.5/5t	1-4Klb	HM-8-402-1/4K	5-10Klb	HM-8-402-5/10K								
Capacity	Part number																			
0.5-2t	HM-8-402-0.5/2t																			
2.5-5t	HM-8-402-2.5/5t																			
1-4Klb	HM-8-402-1/4K																			
5-10Klb	HM-8-402-5/10K																			

# Table of Contents

<p><b>ACCESSORY HM-9-401</b></p>  <p>P100</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>.Alloy steel series weighing integrative subassembly, easy installation, suitable for the measurement of big static load, with very good anti-side loading ability.</li> <li>.Suitable for the measurement of chemic industry, petroleum, and electric power, etc. Hopper and tank system. Alloy steel is able to endure ordinary corrosive environment and gas.</li> </ul>	
<p><b>ACCESSORY HM-9-403</b></p>  <p>P101</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>Alloy steel series weighing integrative subassembly, easy installation, suitable for the measurement of big static load and small dynamic load, with very good anti-side loading ability.</li> <li>Suitable for the measurement of chemic engineering industry, petroleum, and electric power, etc. hopper and tank system. Alloy steel material, be able to endure ordinary corrosive environment and gas.</li> </ul>	
<p><b>ACCESSORY HM-14-401</b></p>  <p>P102</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>.With horizontal locating ability</li> <li>.With anti-reversal ability</li> <li>.With automatically restoration ability</li> <li>.Compact structure, easy installation</li> </ul>	
<p><b>ACCESSORY HM-14-403</b></p>  <p>P103</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>.With horizontal locating ability</li> <li>.With anti-reversal ability</li> <li>.With automatically restoration ability</li> <li>.Compact structure, easy installation(Alloy steel)</li> </ul>	
<p><b>ACCESSORY HY-8-101</b> <b>ACCESSORY HY-8-102</b></p>  <p>P104</p>	<p><b>ACCESSORY HY-8-101</b></p> <p><b>Features</b></p> <ul style="list-style-type: none"> <li>Easy installation, anti-corrosion, non-conversely structure, with restoration ability, suitable for truck scale, platform scale, etc. electronic weighing equipment.</li> </ul>	<p><b>ACCESSORY HY-8-102</b></p> <p><b>Features</b></p> <ul style="list-style-type: none"> <li>.Easy installation</li> <li>.With restoration ability</li> <li>.Anti-partial load and side load</li> <li>.Suitable for electronic platform scale and electronic weighing equipment.</li> </ul>
<p><b>ACCESSORY HY-8-105</b> <b>ACCESSORY HY-14-104</b></p>  <p>P105</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>Easy installation</li> <li>.With restoration ability</li> <li>.Anti-partial load and side load</li> <li>.Suitable for electronic platform scale and electronic weighing equipment.</li> </ul>	
<p><b>JUNCTION BOX JB01</b></p>  <p>P106</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>Special ly designed for electronic scales</li> <li>Users could connect 2 to 8 load 4-core or 6-core load cells.</li> </ul>	
<p><b>JUNCTION BOX JB02</b></p>  <p>P107</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>Cast aluminum, plastic-sprayed.</li> <li>Easy to assemble and calibrate, high reliability.</li> <li>Fully encapsulated, water proof and moisture proof.</li> <li>Sensitivity matched adjusting method.</li> <li>Operating temperature(-40℃~+85℃)</li> </ul>	
<p><b>JUNCTION BOX JB06</b></p>  <p>P108</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>Cast aluminum, plastic-sprayed.</li> <li>Easy to assemble and calibrate, high reliability.</li> <li>Fully encapsulated, water proof moisture proof and lightning protection</li> <li>Surge protection</li> <li>Sensitivity matched adjusting method.</li> <li>Operating temperature(-40℃~+85℃)</li> </ul>	

# Table of Contents

<p><b>JUNCTION BOX JB07</b></p>  <p>P109</p>	<p><b>Features</b>          Cast aluminum, plastic-sprayed.          Easy to assemble and calibrate, high reliability.          Fully encapsulated; water proof moisture proof and lightning protection          Surge protection          Consistency matched adjusting method.          Operating temperature(-40°C~+85°C)</p>
<p><b>TRANSMITTER FD-3</b></p>  <p>P110</p>	<p><b>Features</b>          Adjustable stable voltage.          Voltage counter-connection protection.          Zero adjustable resistors can be outer connected.          Terminal tabs connection.</p>
<p><b>TRANSMITTER FD-4</b></p>  <p>P111</p>	<p><b>Features</b>          Connection for 2 to 4 load cells          Easy to assemble and calibrate, high reliability.          Voltage counter-connection protection.          Water proof.          Voltage or current output signal</p>
<p><b>TRANSMITTER FD-5</b></p>  <p>P112</p>	<p><b>Features</b>          Connection for 2 to 4 load cells          Surge protection.          Voltage counter-connection protection          Voltage or current output signal.          Terminal tabs connection.          The installation holes applied on the cover making it easy to fix on the platform.</p>
<p><b>TRANSMITTER FD-6</b></p>  <p>P113</p>	<p><b>Features</b>          Connection for 2 to 4 load cells          Voltage counter-connection protection          Easy to assemble and calibrate, high reliability          Water proof          Current output signal          The installation holes applied on the cover making it easy to fix on the platform.</p>

